

# Arbitrary Elastic Topologies and Ocular Dominance

Peter Dayan

CNL, The Salk Institute

PO Box 85800

San Diego, CA 92186-5800

## Abstract

The elastic net, which has been used to produce accounts of the formation of topology preserving maps and ocular dominance columns (OD), embodies a nearest neighbour topology. A Hebbian account of OD is not so restricted – and indeed makes the prediction that the width of the columns depends on the nature of the (more general) neighbourhood relations.

Elastic and Hebbian accounts have recently been unified – raising a question mark about their different determiners of column widths. This paper considers this issue, and demonstrates theoretically that it is possible to use more general topologies in the elastic net, including those effectively adopted in the Hebbian model.

## 1 Introduction

Durbin and Willshaw's (1987) elastic net algorithm for solving the travelling salesperson problem (TSP) is based on a method for developing topology-preserving maps between the eye and brain (lateral geniculate nucleus and cortex for mammals) due to von der Malsburg and Willshaw (1977) and Willshaw and von der Malsburg (1979). The elastic algorithm inspired a host of similar ones aimed at different optimisation tasks, one of which is this topology problem, augmented by two associates – forming ocular dominance stripes and orientation selective cells (Goodhill and Willshaw GW, 1990; Durbin and Mitchison, 1990).

Simić (1990, 1991) and Yuille (1990) looked at the relationship between elastic algorithms and Hebbian inspired ones (Hopfield and Tank, 1985), showing that both mechanisms could be viewed as optimising the same functions, albeit implementing differently the constraints (for the TSP, that each city should be visited exactly once). More recently, Yuille, Kolodny and Lee (YKL, 1991) repeated the feat and aligned elastic and Hebbian (Miller, Keller and Stryker MKS, 1989) accounts of ocular dominance.

The elastic net for the TSP consists of a set of points on a computational rubber band, pulled by forces toward the cities that have to be visited and by tension. The energy in a stretched rubber band is proportional to the square of its extension, which is incorrect for modelling the length of a tour (proportional just to the extension, in this model), but Durbin (cited as a personal communication in Yuille, 1990) suggests that changing the elastic net to use the absolute distance rather than its square is infelicitous. Hopfield and Tank’s (1985) model does in fact use the actual distances, and so, as they lucidly discuss, Simić’s and Yuille’s match between the elastic and Hebbian algorithms is not perfect.

The nature of the topologies is even more mysterious in the match between Hebbian and elastic algorithms for ocular dominance. Topology enters MKS’ model through a cortical interaction function, which involves more than just the nearest neighbours. Conversely, these are the natural topology for the elastic version. This has led to an apparent difference between the predictions of MKS and GW. MKS suggested that the width of ocular dominance stripes is governed by the width of the cortical interaction function, whereas GW predicted that it is dependent on the relative correlations within and between the two eyes.

This paper considers the issue by examining the two models of ocular dominance. The next section reviews YKL’s analysis, and section 3 looks at generalising the nearest neighbour topology, testing the generalisation in a one-dimensional version of ocular dominance.

## 2 Yuille, Kolodny and Lee’s Analysis

YKL unify the two models through the medium of a single cost function, which defines a generalised deformable model:<sup>1</sup>

$$E [\mathcal{V}^L, \mathcal{V}^R, \mathbf{Y}] = \sum_{ia} \left\{ \mathcal{V}_{ai}^L |\mathbf{x}_i^L - \mathbf{y}_a|^2 + \mathcal{V}_{ai}^R |\mathbf{x}_i^R - \mathbf{y}_a|^2 \right\} + \frac{\nu}{2} \sum_a |\mathbf{y}_a - \mathbf{y}_{a+1}|^2 \quad (1)$$

---

<sup>1</sup>For convenience, this paper will look at the one-dimensional versions of the various tasks. Extensions to the second dimension are straightforward, but messy. Also, YKL separate out the retinotopy dimension – whereas it is incorporated here into the continuous variables  $\mathbf{x}$  and  $\mathbf{Y}$ .

where  $\nu_{ai}^L$  and  $\nu_{ai}^R$  are the variables matching the  $i^{\text{th}}$  unit in the left and right eyes respectively to the  $a^{\text{th}}$  unit in the cortex,  $\mathbf{x}_i^L$  and  $\mathbf{x}_i^R$  are the retinal ‘positions’ of the  $i^{\text{th}}$  unit in the left and right eyes,  $\mathbf{y}_a$  is the ‘position’ of the  $a^{\text{th}}$  unit in the cortex, and  $\mathbf{Y} \equiv \{\mathbf{y}_a\}$ . As GW and YKL say, these ‘positions’ are defined somewhat abstractly; however they are intended to capture something like the correlations between the firings of the retinal and cortical units.  $\nu$  is a constant which governs the relative weighting of the first term, which measures how close, correlationally, matching cells are, and the second term, which measures how close neighbouring cortical cells are. This cost function owes its power of unification to having both matching  $\nu$  and continuous  $\mathbf{Y}$  variables.

The constraint on both retinal and cortical fields on a solution – that each cell should have a unique partner – is effectively duplicated in these two sets of variables.<sup>2</sup> Minimising  $E$  subject to these constraints leads to the optimal map. Hebbian and elastic methods are effectively different ways of minimising this function, imposing different constraints in different manners on the way to deriving a solution. Both use Hopfield and Tank’s key insight for the TSP that the constraints need not *all* hold throughout the optimisation process, so long as they are guaranteed to be satisfied by the time the algorithm terminates.

The reduction to an elastic net comes from eliminating the  $\nu^L$  and  $\nu^R$  variables using a Gibbs trick. The probability of a particular assignment of  $\nu$  and  $\mathbf{Y}$  is declared to be proportional to  $e^{-\beta E[\nu^L, \nu^R, \mathbf{Y}]}$ , and these terms are summed over the set of  $\nu^R$  and  $\nu^L$  that satisfy the partial constraint that each cell in the cortex maps to a unit in either the left or the right eye, but not both. The resulting elastic energy function is<sup>3</sup>

$$E_{\text{eff}}[\mathbf{Y}] = -\frac{1}{\beta} \sum_a \log \left\{ \sum_i e^{-\beta |\mathbf{x}_i^L - \mathbf{y}_a|^2} + e^{-\beta |\mathbf{x}_i^R - \mathbf{y}_a|^2} \right\} + \frac{\nu}{2} \sum_a |\mathbf{y}_a - \mathbf{y}_{a+1}|^2. \quad (2)$$

Note that the topology term survives this reduction intact, since it does not depend on the  $\nu$ .

The alternative to eliminating the  $\nu$  variables is to eliminate the  $\mathbf{Y}$ . YKL do this by regarding  $E[\nu^L, \nu^R, \mathbf{Y}]$  as a quadratic form in  $\mathbf{Y}$  which has a minimum at  $\mathbf{Y}_*[\nu^L, \nu^R]$ .

<sup>2</sup>In terms of these variables: for each  $a$ , one of the collection over  $i$  of  $\{\nu_{ai}^L, \nu_{ai}^R\}$  should be 1 and all the rest 0, and for each  $i$  the same should be true of the collection over  $a$ . Also, for each  $a$ ,  $\mathbf{y}_a$  should be the same as one  $\mathbf{x}_i^L$  or  $\mathbf{x}_i^R$ , and for each  $i$ , there should be different  $a_1$  and  $a_2$  such that  $\mathbf{y}_{a_1} = \mathbf{x}_i^L$  and  $\mathbf{y}_{a_2} = \mathbf{x}_i^R$ .

<sup>3</sup>Here and throughout, boundary conditions are avoided by assuming toroids and using modulo arithmetic.

Imposing the normalisation constraint (see MKS) that each cortical cell receives a constant weight from the retina:

$$\sum_i \mathcal{V}_{ai}^L + \mathcal{V}_{ai}^R = 1 \quad \forall a \quad (3)$$

gives

$$(\mathcal{I} + \nu\mathcal{T})\mathbf{Y}_*^T = \mathcal{V}^L\mathbf{X}^{LT} + \mathcal{V}^R\mathbf{X}^{RT}$$

where  $\mathbf{X}^L = \{\mathbf{x}_i^L\}$  and  $\mathbf{X}^R = \{\mathbf{x}_i^R\}$ , and

$$\mathcal{T}_{ab} = \begin{cases} 2 & a = b \\ -1 & a = b + 1 \\ -1 & a = b - 1 \\ 0 & \text{otherwise} \end{cases}$$

embodies the toroidal nearest neighbour topology. Therefore, at the minimum

$$\mathbf{Y}_*^T = (\mathcal{I} + \nu\mathcal{T})^{-1} (\mathcal{V}^L\mathbf{X}^{LT} + \mathcal{V}^R\mathbf{X}^{RT}),$$

where the inverse exists for  $\nu > 0$ . Substituting back into equation 1, imposing the constraints in equation 3, and ignoring terms that do not depend on the  $\mathcal{V}$ , gives

$$\begin{aligned} E[\mathcal{V}^L, \mathcal{V}^R] &= \frac{1}{2} \sum_{abij} \left\{ (\mathcal{I} + \nu\mathcal{T})_{ab}^{-1} \mathcal{V}_{ai}^L \mathcal{V}_{bj}^L \left| \mathbf{x}_i^L - \mathbf{x}_j^L \right|^2 + \right. \\ &\quad \left. (\mathcal{I} + \nu\mathcal{T})_{ab}^{-1} \mathcal{V}_{ai}^R \mathcal{V}_{bj}^R \left| \mathbf{x}_i^R - \mathbf{x}_j^R \right|^2 + \right. \\ &\quad \left. 2(\mathcal{I} + \nu\mathcal{T})_{ab}^{-1} \mathcal{V}_{ai}^L \mathcal{V}_{bj}^R \left| \mathbf{x}_i^L - \mathbf{x}_j^R \right|^2 \right\}. \end{aligned} \quad (4)$$

MKS' Hebbian system regards the output  $o_a$  of cortical cell  $a$  as coming partly from the input from the two eyes  $\mathbf{i}^L$  and  $\mathbf{i}^R$  through the connection matrix,  $[\mathcal{V}^L\mathbf{i}^L + \mathcal{V}^R\mathbf{i}^R]_a$ , and partly from the other cortical cells  $[\mathcal{D}\mathbf{o}]_a$  (MKS call  $\mathcal{C} \equiv (\mathcal{I} - \mathcal{D})^{-1}$  the cortical interaction function):

$$\begin{aligned} \mathbf{o} &= \mathcal{V}^L\mathbf{i}^L + \mathcal{V}^R\mathbf{i}^R + \mathcal{D}\mathbf{o} \\ &= (\mathcal{I} - \mathcal{D})^{-1} (\mathcal{V}^L\mathbf{i}^L + \mathcal{V}^R\mathbf{i}^R) \end{aligned} \quad (5)$$

Hebbian learning changes  $\mathcal{V}_{aj}^L$  proportional to  $\langle o_a i_j^L \rangle$ , where the angle-brackets represent an averaging process. Defining

$$D_{jk}^{LL} = \langle i_j^L i_k^L \rangle, \quad D_{jk}^{RR} = \langle i_j^R i_k^R \rangle, \quad \text{and} \quad D_{jk}^{LR} = \langle i_j^L i_k^R \rangle,$$

YKL show that the  $\mathcal{V}$  are moving down the gradient of

$$E_{\text{MKS}} [\mathcal{V}^L, \mathcal{V}^R] = -\frac{1}{2} \sum_{abij} \left\{ (\mathcal{I} - \mathcal{D})_{ab}^{-1} \mathcal{V}_{ai}^L \mathcal{V}_{bj}^L D_{ij}^{LL} + \right. \\ \left. (\mathcal{I} - \mathcal{D})_{ab}^{-1} \mathcal{V}_{ai}^R \mathcal{V}_{bj}^R D_{ij}^{RR} + \right. \\ \left. 2(\mathcal{I} - \mathcal{D})_{ab}^{-1} \mathcal{V}_{ai}^L \mathcal{V}_{bj}^R D_{ij}^{LR} \right\}. \quad (6)$$

Compare equations 4 and 6. YKL argue that for the intent of comparing minima, one can identify  $K - |\mathbf{x}_i^L - \mathbf{x}_j^L|^2$  with  $D_{ij}^{LL}$  and similarly for  $D_{ij}^{RR}$  and  $D_{ij}^{LR}$ , for some constant  $K$ . Therefore, if  $-\mathcal{D} = \nu\mathcal{T}$ , these two expressions will have the same interesting minima – so, provided that the constraints are properly satisfied during learning, they should lead to the same ultimate solution.<sup>4</sup>

The cortical interaction function calculated from  $\mathcal{T}$  (using  $\nu = 3/4$ ) is shown in figure 1. Although YKL show that this is enough to produce interesting ocular dominance stripes, it is clearly not the same as MKS’ cortical interaction function which is shown in the same figure. It is also obvious why elastic and Hebbian models make different predictions about the factors determining stripe widths – the cortical interaction function corresponding to the elastic topology is immutable. The next section considers alternatives.

### 3 Generalising Elastic Topologies

The shape of the interaction function comes from the term  $\sum_a |y_a - y_{a+1}|^2$  in equation 1. A more general quadratic form for this is

$$\sum_{ab} y_a^T \mathcal{S}_{ab} y_b = \text{tr} \{ \mathbf{Y}^T \mathbf{Y} \mathcal{S} \}. \quad (7)$$

For instance, if  $\mathcal{S} = \mathcal{T}$ , then this reduces to exactly the same expression as in equation 1. Note also that this formulation is sufficiently general as to model the case of two-dimensional retina and cortex, although it does not extend to non-quadratic cases such as the length rather than the square of the length for the TSP.

<sup>4</sup>YKL actually derive a different condition for matching – that  $\xi\mathcal{T} = (\mathcal{I} - \mathcal{D})^{-1}$  for some constant  $\xi$ . The truth of this would appear to depend on  $\sum_{aij} \mathcal{V}_{ai}^L \mathcal{V}_{aj}^R |\mathbf{x}_i^L - \mathbf{x}_j^L|^2$ , and the similar expressions for  $\mathcal{V}^R \mathcal{V}^R$  and  $\mathcal{V}^R \mathcal{V}^L$ , being constant over the  $\mathcal{V}$  that satisfy the partial constraints.

Such a change has little effect on the elastic energy function from equation 2, which becomes:

$$E_{\text{eff}}[\mathbf{Y}] = -\frac{1}{\beta} \sum_a \log \left\{ \sum_i e^{-\beta |\mathbf{x}_i^L - \mathbf{y}_a|^2} + e^{-\beta |\mathbf{x}_i^R - \mathbf{y}_a|^2} \right\} + \frac{\nu}{2} \text{tr} \{ \mathbf{Y}^T \mathbf{Y} \mathcal{S} \}.$$

However, differentiating  $E$  as a quadratic form to eliminate the  $\mathbf{Y}$  leads to

$$(\mathcal{I} + \nu \mathcal{S}) \mathbf{Y}_*^T = \nu^L \mathbf{X}^{L^T} + \nu^R \mathbf{X}^{R^T}$$

assuming that  $\mathcal{S}$  is symmetric. If  $\mathcal{S}$  also has a similarity property such that  $\sum_b (\mathcal{I} + \nu \mathcal{S})_{ab}^{-1}$  does not depend on  $a$ ,<sup>5</sup> then substituting back in gives the energy function:

$$E[\nu^L, \nu^R] = \frac{1}{2} \sum_{abij} \left\{ (\mathcal{I} + \nu \mathcal{S})_{ab}^{-1} \nu_{ai}^L \nu_{bj}^L |\mathbf{x}_i^L - \mathbf{x}_j^L|^2 + (\mathcal{I} + \nu \mathcal{S})_{ab}^{-1} \nu_{ai}^R \nu_{bj}^R |\mathbf{x}_i^R - \mathbf{x}_j^R|^2 + 2(\mathcal{I} + \nu \mathcal{S})_{ab}^{-1} \nu_{ai}^L \nu_{bj}^R |\mathbf{x}_i^L - \mathbf{x}_j^R|^2 \right\}.$$

As above, setting  $\mathcal{D} = -\nu \mathcal{S}$  to unify the elastic and Hebbian energy functions allows Hebbian modelling of arbitrary elastic topologies and *vice versa*.

One way of generating elastic topologies is to consider them in terms of an estimation problem. Say that  $\sum_b \mathcal{E}_{ab} \mathbf{y}_b$  is an estimate of  $\mathbf{y}_a$ . Then, the total square estimate error is

$$\sum_a \left| \mathbf{y}_a - \sum_b \mathcal{E}_{ab} \mathbf{y}_b \right|^2 = \sum_{ab} \mathbf{y}_a (\mathcal{I} - \mathcal{E})^T (\mathcal{I} - \mathcal{E}) \mathbf{y}_b$$

Comparing this with equation 7 shows that  $\mathcal{S} = (\mathcal{I} - \mathcal{E})^T (\mathcal{I} - \mathcal{E})$ .  $\mathcal{T}$  can be generated this way, by making  $\mathcal{E}_{a(a+1)} = 1$  and the remaining components 0. Another example comes from estimating  $\mathbf{y}_a$  as the average of both its neighbours, *ie* setting:

$$\mathcal{E}_{ab} = \frac{1}{2} \begin{cases} 1 & b = a + 1, b = a - 1 \\ 0 & \text{otherwise} \end{cases} \implies \mathcal{S}_{ab} = \frac{1}{4} \begin{cases} 6 & b = a \\ -4 & b = a + 1, b = a - 1 \\ 1 & b = a + 2, b = a - 2 \\ 0 & \text{otherwise} \end{cases} \quad (8)$$

whose associated cortical interaction function more closely resembles the MKS mexican hats (see figure 1). Note that although for any  $\mathcal{E}$  there is a unique associated  $\mathcal{S}$  and therefore  $\mathcal{C}$ , the same is not true the other way around. Symmetric  $\mathcal{S}$  will only have a square

<sup>5</sup>This holds if the topology is the same over the whole cortex.

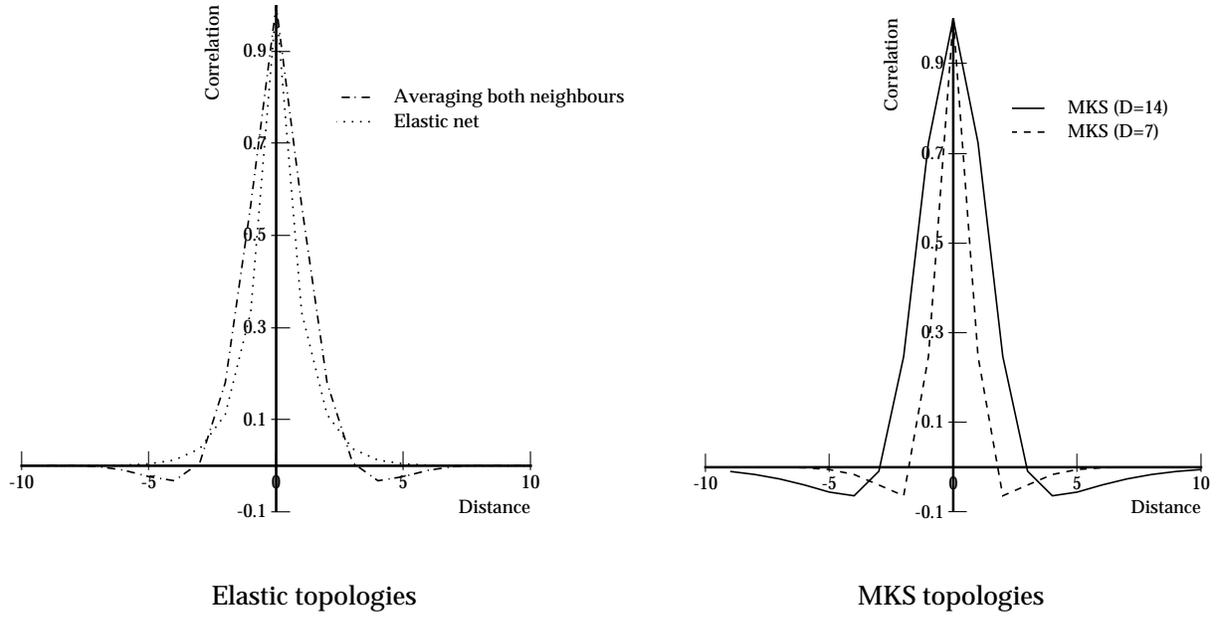


Figure 1: Cortical interaction functions.

root if all its eigenvalues are positive, and it is easy to generate seemingly plausible  $\mathcal{C}$  for which this is not the case.

MKS generated their  $\mathcal{C}$  as

$$\mathcal{C}_{ab} = e^{-\frac{|a-b|^2}{(\kappa D)^2}} - \frac{1}{9}e^{-\frac{|a-b|^2}{(3\kappa D)^2}} \quad (9)$$

where  $\kappa = 1/7.5$  and  $D = 7$  was the width of their arbor function (the number of cortical cells to which a retinal cell would connect). Changing  $D$  changes the length scale of the cortical interaction, and so changes the optimal stripe width. Figure 1 shows graphs of the elastic net cortical interaction function, the mexican hat one from equation 8, and two generated from MKS – one with  $D = 7$  and one with  $D = 14$ .

One way to test the generalised topology terms is to use them in the cost function of equation 1 and to consider the optimal stripe width for the ocular dominance maps this defines.<sup>6</sup> It is convenient to study the 1-dimensional case, since the interesting optima are just ‘Z’ folds, as in the left-hand side of figure 2 (after GW). Maps inspired by the sideways ‘U’ shape on the right-hand side of the figure will, in many cases, have lower

<sup>6</sup>If the appropriate constraints are satisfied, one of the equivalent equations such as 4 can also be used.

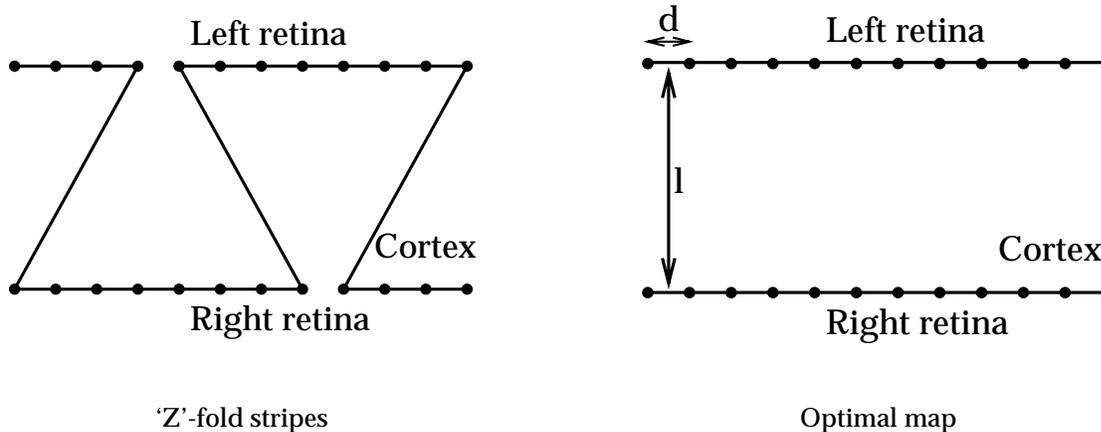


Figure 2: One dimensional ocular dominance maps.

costs than these – however they are ruled out as the cortex does not traverse the retinae appropriately. Given particular spatial locations of the retinal cells, it is straightforward to calculate the cost per unit length of Z-folds of varying widths – the width that minimises this is the one both Hebbian and elastic algorithms should find.

GW show that the optimal width of a stripe for the basic elastic topology is  $2l/d$ , where  $l$  is the separation of the two retinae and  $d$  is the distance between two cells within a retina. Simulations verified this, using the elastic net topology  $\mathcal{T}$ . Note that increasing  $l$  increases  $|\mathbf{x}_i^L - \mathbf{x}_j^R|^2$  in the third term of equation 4, leaving the other distance terms unaltered.

For the MKS topology, the optimal width should increase with  $D$ , the length scale of the cortical interaction function. The analysis above suggests that it should also increase with  $l$ , given the common energy function. Both of these are demonstrated in figure 3, which shows how the optimal Z-fold stripe width  $w$  varies with both  $l$  and  $D$ . With the exception of the patch for low  $l$  and high  $D$ , this is monotonic in both variables.

Note that as  $D$  increases, the matrix  $\mathcal{C}$  becomes increasingly singular, which forces implausible constraints on the cortical connectivity. Also small stripes are favoured for large  $D$  and small  $l$ , since they benefit more from the negative contributions from the influences of widely separated cells than they lose through the cost of switching between the retinae. In fact the cost function becomes tri-modal in the width of the stripes in this regime; one optimum is at the minimum stripe width, another is at the sideways ‘U’ of figure 2 and

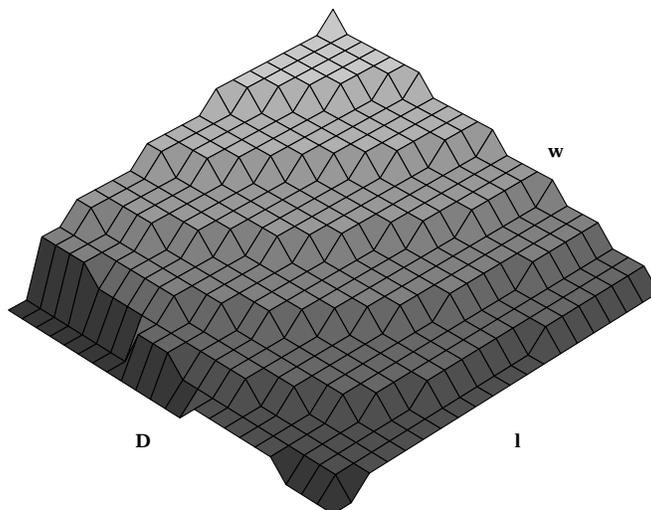


Figure 3: Optimal Z-fold stripe width  $w$  versus length scale  $D$  of the cortical interaction function and distance  $l$  between the retinae. The cost function values  $E$  were calculated from equation 4, replacing  $(\mathcal{I} + \nu \mathcal{T})^{-1}$  with  $\mathcal{C}$  generated using equation 9.

the third is at the width that would preserve monotonicity in figure 3.

## 4 Discussion

It is natural to wish to incorporate more extensive topologies into the elastic net than the rather impoverished nearest neighbour one with which it is presently endowed. One particular motivation for this comes from the apparent conflict between the predictions of stripe width from the elastic and Hebbian theories of the development of ocular dominance. However it is important in other cases such as graph matching in von der Malsburg's (1981) correlation theory of brain function. In this, fine scale temporal correlations in the firing of cells in a field are determined by the topology of the object being represented on that field, and inference consists of matching this graph with an isomorphic one on another field. If the fine scale temporal correlations embody more than nearest neighbour correlations (and inference will be faster if they do), then describing this process in elastic terms will require a more general topology too.

This paper has used the formalism of generalised deformable models to consider how general topologies fit into an elastic net framework. It demonstrates that this is effective by showing how the optimal stripe widths theoretically change with changing cortical length scales. However, it does remain to be seen which of the alternatives lead to stable elastic algorithms. Designer topologies are as simple to specify as designer error functions, and it will be interesting to see if there is an equivalent wealth of well motivated examples.

## Acknowledgements

I am very grateful to Geoff Goodhill for introducing me to the problems of ocular dominance and for providing constant encouragement and assistance throughout this study. I also thank David MacKay, Terry Sejnowski, Martin Simmen, David Willshaw and Alan Yuille for their help. Support was from the SERC.

## References

- [1] Durbin, R & Mitchison, G (1990). A dimension reduction framework for cortical maps. *Nature*, **343**, pp 644-647.
- [2] Durbin, R, Szeliski, R & Yuille, AL (1989). An analysis of the elastic net approach to the travelling salesman problem. *Neural Computation* **1**, pp 348-358.
- [3] Durbin, R & Willshaw, DJ (1987). An analogue approach to the travelling salesman problem using an elastic net method. *Nature* **326**, pp 689-691.
- [4] Goodhill, GJ & Willshaw, DJ (1990). Application of the elastic net algorithm to the formation of ocular dominance stripes. *Network*, **1**, pp 41-61.
- [5] Hopfield, JJ & Tank, DW (1985). Neural computation of decisions in optimization problems. *Biological Cybernetics*, **52**, pp 141-152.
- [6] Miller, KD, Keller, JB & Stryker, MP (1989). Ocular dominance column development: Analysis and simulation. *Science*, **245**, pp 605-615.

- [7] Simić, PD (1990). Statistical mechanics as the underlying theory of “neural” and “elastic” optimizations. *Network*, **1**, pp 89-104.
- [8] Simić, PD (1991). Constrained nets for graph matching. *Neural Computation*, **3**, pp 268-281.
- [9] von der Malsburg, C (1981). *The Correlation Theory of Brain Function*. Internal report 81-2, Max-Planck Institute for Biophysical Chemistry, Göttingen, Germany.
- [10] von der Malsburg, C & Willshaw, DJ (1977). How to label nerve cells so that they interconnect in an ordered fashion. *Proceedings of the National Academy of Science, USA*, **74**, pp 5176-5178.
- [11] Willshaw, DJ & von der Malsburg, C (1979). A marker induction mechanism for the establishment of ordered neural mappings: its application to the retinotectal problem. *Philosophical Transactions of the Royal Society B*, **287**, pp 203-243.
- [12] Yuille, AL (1990). Generalised deformable templates, statistical physics and matching problems. *Neural Computation*, **2**, pp 1-24.
- [13] Yuille, AL, Kolodny, JA & Lee, CW (1991). Dimension reduction, generalized deformable models and the development of ocularity and orientation. *Proceedings of the International Joint Conference on Neural Networks*, Seattle, WA.